CONSTRUCTOR UNIVERSITY

Compiling and Linking C / C++ Programs

Instructor: Peter Baumann

email: pbaumann@constructor.university

tel: -3178

office: room 88, Research 1

CPU @ Work

- ...watch your code like you never have seen it before!

Compile/Link Steps Overview

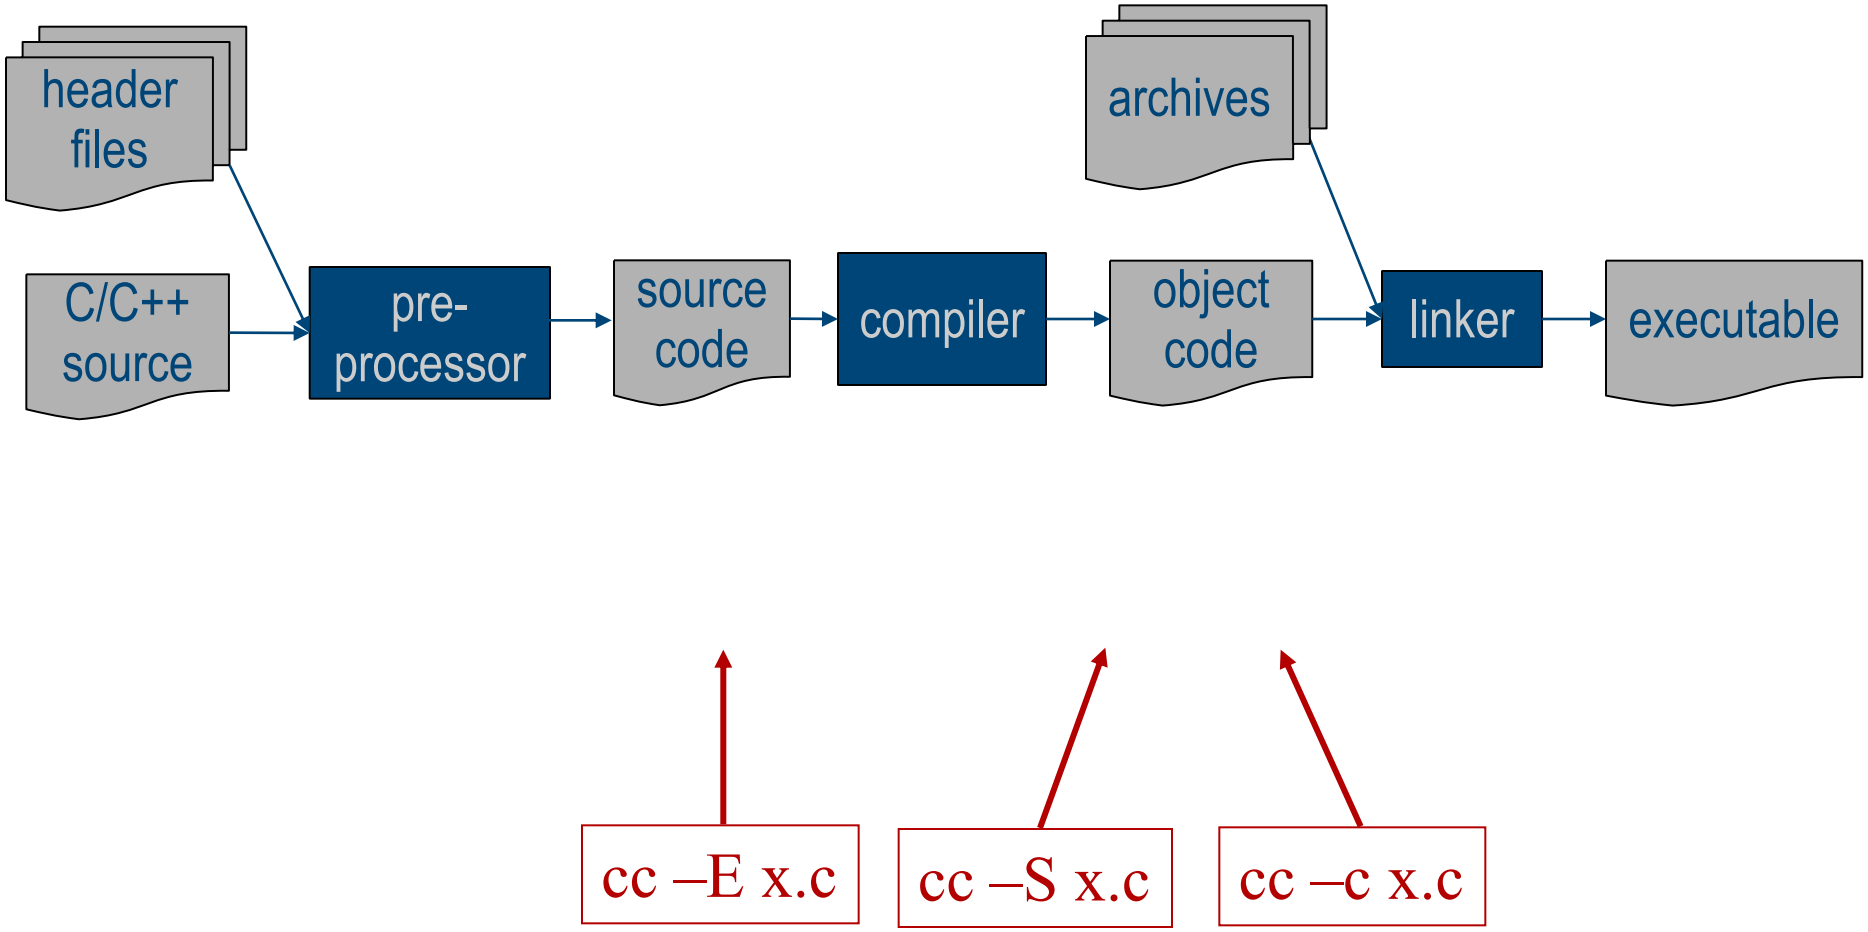

The C Preprocessor

- Purpose:
  - Define commonly used constants, code fragments, etc.
  - Conditional compilation (code activation depending on external settings)
- Main mechanism: replace by textual substitution
  - No idea about semantics (parentheses, semicolons, ...) !!
  - Does not follow C syntax
- Preprocessor directives
  - `#include`
  - `#define`
  - `#if / #ifdef`
  - …plus more

```
#define X 1
```

```
const int x = 1;
```

The C(++) Compiler

- Task: Generate (relocatable) machine („object“) code from source code
- Relocation: code can sit at different places in address space
- Address space classified into „segments“
  - Code, text, data, ...
- Note: OS (with HW support) uses this to implement user address space
  - Actual main memory address = base address + relative address
  - Base address kept in segment register, added dynamically by CPU
  - Security: program cannot access base register ("priviledged mode"), hence cannot address beyond its segment limits

Object Files

- Contain code for a program fragment (module)
  - Machine code, constants, size of static data segments, ...
- `$ nm rasserver_main.o`

```
0000000c D clientTimeOut
         U __cxa_allocate_exception
         U __cxa_begin_catch
         U __cxa_end_catch
         U __cxa_free_exception
         U __cxa_throw
00000004 B debugOutput
         U free
         U getenv
00000120 B globalHTTPPort
00000000 T main
         U memset
```

or `objdump`

External Functions & Variables

- Module **`server`**:
  Variable **`sema`** allocated in data segment
- Module **`client`**:
  functions obtain sema address by
  - Module **`server`** offset
    + local address **`sema`**
- Cross-module addressing rules:
  - (no modifier) = locally allocated, globally accessible
  - static = locally allocated, locally accessible
  - extern = allocated in other compilation unit
- Why is this wrong?
  - `extern int sema = 1;`

```
int sema = 0;

int serverBlock()
{
if (sema==0)
       sema = 1;
return sema;
}
```

```
extern int sema;

int clientBlock()
{
if (sema==0)
       sema = 1;
return sema;
}
```

Name Mangling

- Problem: classes convey complex naming, not foreseen in classic linkage
  - Classes, overloading, name spaces, ...
    - *Ex:* `MyClass1::myFunc()`
      `MyClass2::myFunc()`
  - But only named objects in files, flat namespace
- Solution: name mangling
  - Compiler modifies names to make them unique (prefix/suffix)
  - Ex: **`Transaction::begin()`**
    ➔ **`_ZN13r_Transaction5beginENS_8r_TAModeE`**
- Every compiler has its individual mangling algorithm!
  - Code compiled with different compilers is incompatible

The Linker/Loader

- Task: generate *one* executable file from *several* object and library files
  - Read object files
  - Resolve addresses from (relocatable) code
  - Link runtime code (start/exit handling!)
  - Add all code needed from libraries
  - If required: establish stubs to dynamic libraries
  - Write executable code into file, set magic number, etc.

John R. Levine:
Linkers and Loaders.
Morgan Kaufmann, 1999

- cc, g++, etc. have complex logics inside
  - can silently *invoke* linker, don't link themselves!
  - Common shorthand: `cc -o x x.c`
- Ex: `ld -o x /lib/crt0.o x.o -lc`

Address Space: Stack, Heap & Friends

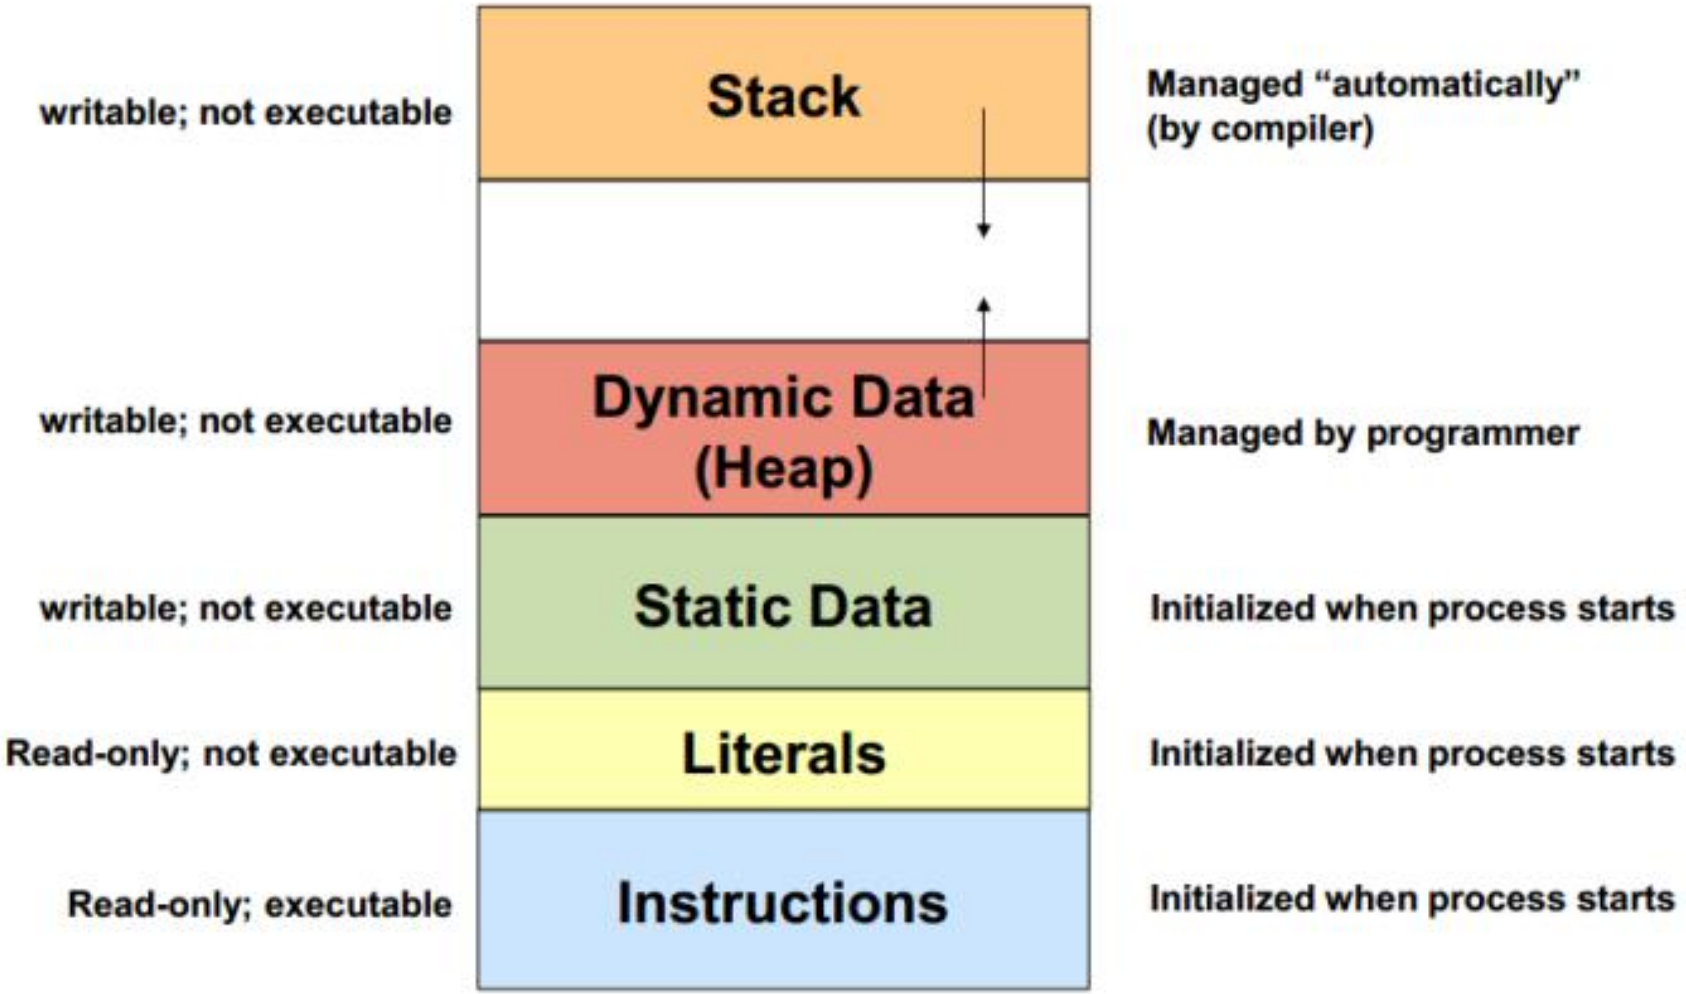

Refs: iTecNote, C++ memory mgmt

What It Really Looks Like

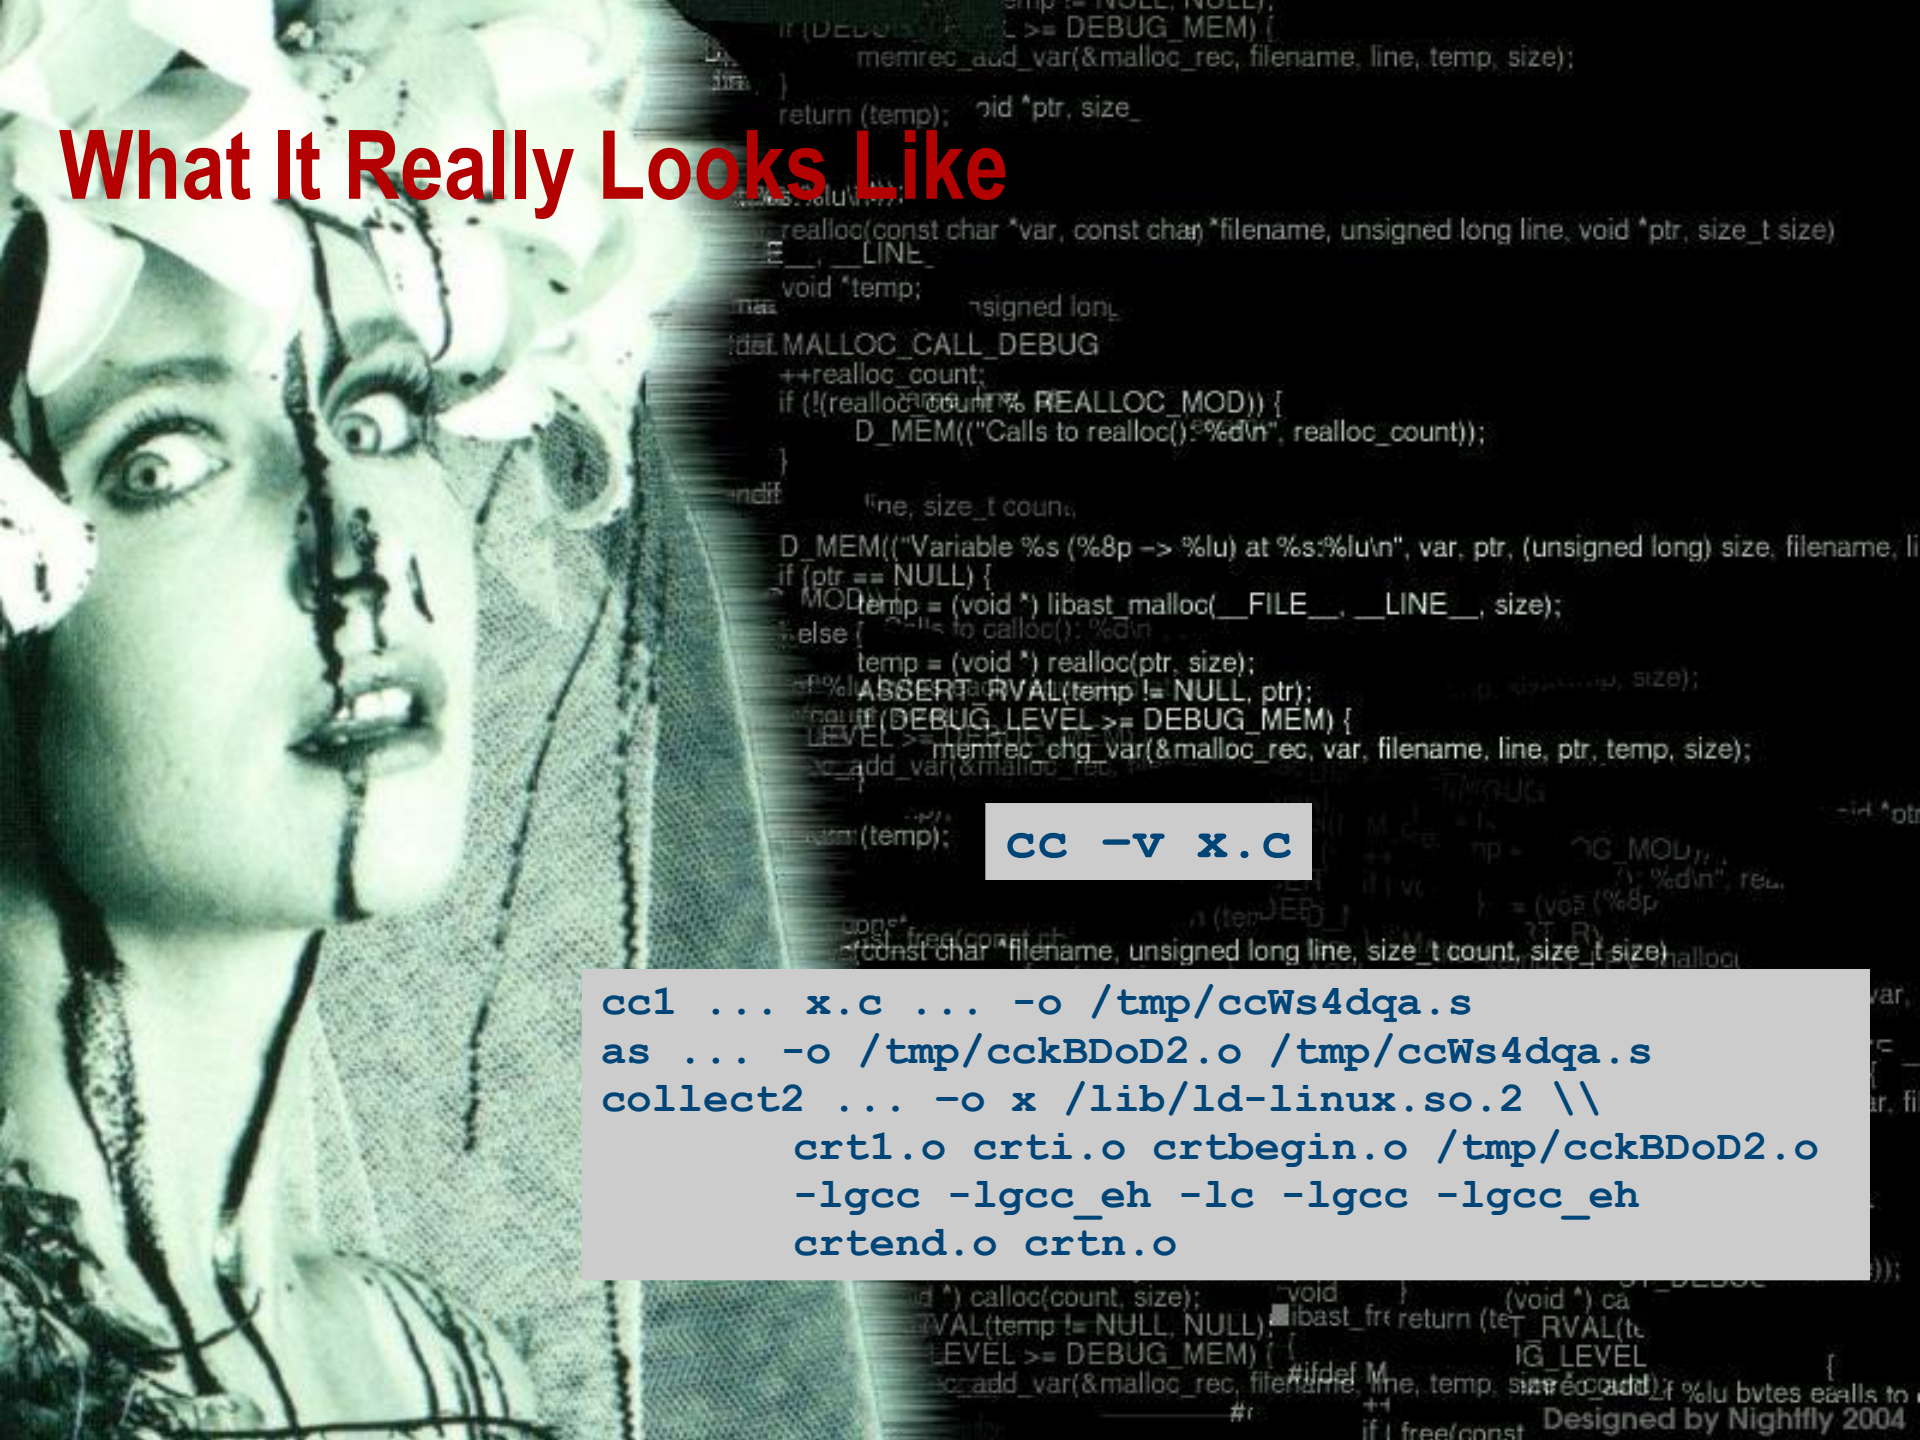

```
cc -v x.c
```

```
cc1 ... x.c ... -o /tmp/ccWs4dqa.s
as ... -o /tmp/cckBDoD2.o /tmp/ccWs4dqa.s
collect2 ... -o x /lib/ld-linux.so.2 \\
        crt1.o crti.o crtbegin.o /tmp/cckBDoD2.o
        -lgcc -lgcc_eh -lc -lgcc -lgcc_eh
        crtend.o crtn.o
```

Designed by Nightfly 2004

Strip

- By default, executable contains symbol tables
  - Function names, addresses, parametrization
  - Static variables
  - ...some more stuff
- Disadvantages:
  - Allows reverse engineering (gdb!)
  - Substantially larger code files
- Before shipping: strip executables
  - `file rasserver`
    ```
    rasserver: ELF 32-bit LSB executable, Intel 80386, version
    1 (SYSV), for GNU/Linux 2.2.5, dynamically linked (uses
    shared libs), not stripped
    ```
  - `strip rasserver`

Libraries (Archive Files)

- Library = archive file containing a collection of object files
  - Code fragments (classes, modules, ...)
  - `ar rv libxxx.a file1.o file2.o ...`
- Object files vs. Libraries
  - Object file linked in completely, from library only what is actually needed
- Static vs. Dynamic
  - Static library: code is added to the executable, just like object file; not needed after linkage
  - Dynamic library: only stub linked in, runtime system loads; needed at runtime (version!)
- Naming conventions (Linux)
  - Static libraries: **`libxxx.a`**
  - Dynamic libraries: **`libxxx.so`**
  - link with: **`ld ... -lxxx`**

Schematic Program Run

- OS:
  - Open file
  - Look at first page:
    magic number, segment sizes, etc.
  - Allocate segments
    (code, runtime stack, heap, ...)
  - Read code file into code segment
  - Set up process descriptor
    (external resources, limits, ...)
  - Pass control to this process
  - Handle system calls
  - Terminate program,
    free process slot and resources
- Application program:
  - Set up runtime environment
    (**`argv/argc`**, ...)
  - Call **`main()`**
  - On system calls, interrupts, etc.:
    pass control to OS
  - Upon **`exit()`**,
    or **`main()`**'s **`return`**,
    or a forced abort:
    clean up (close file descriptors, sockets, ...),
    pass back to OS

Summary

- To create executable program, you must perform:
  - Preprocess – textually expands definitions, condition-guarded code pieces
  - Compile – translates source code into relocatable machine code („object code“)
  - Link – bind object files and archives into executable program

```
cc -o x x.c
```

=

```
cpp x.c x.cpp
cc -o x.o -c x.cpp
ld -o x /lib/crt0.o x.o -lc
```